




**REEL RACKS**

STORE AND DISPENSE VIRTUALLY ANY PRODUCT THAT MUST BE PAYED OUT FROM A REEL

MECO OMAHA's Reel Rack is built to withstand the abuse and punishment found in a manufacturing or distribution environment. Store and dispense poly or wire rope, hose, electrical cable or chain—anything on a reel or spool. Double welded uprights are manufactured from hefty 3" structural channel and welded to a 4" channel base. 96" units have 3 pair of axle brackets, 120" and 144" units have 4 pair (additional brackets may be ordered separately). The special MECO OMAHA axle bracket is adjustable on 2" centers up and down the uprights; brackets accept axle up to 2 1/2" diameter (not supplied by MECO OMAHA). It is strongly recommended that units be secured to the floor before use. Ships knocked down; gray enamel finish with orange axle brackets.

**RR438**  
20,000 lb. capacity

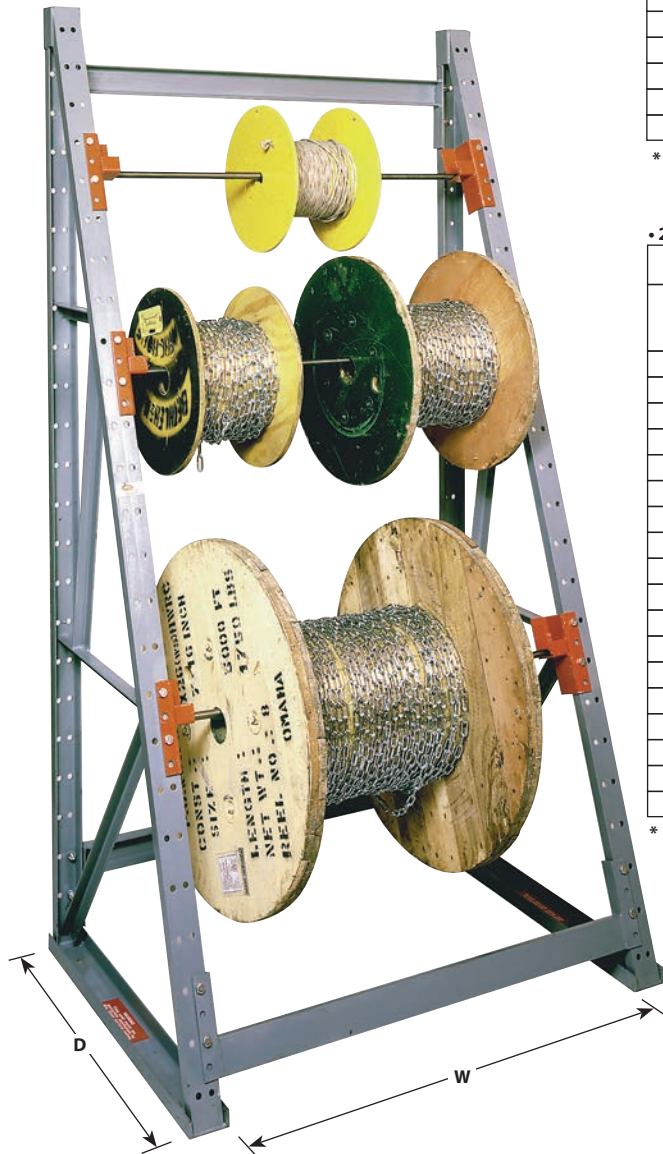

**• 2000 LB CAPACITY PER LEVEL**

STARTER UNITS					
MODEL NO.	DIMENSIONS*			MAX. REEL WIDTH	WEIGHT
	WIDTH	DEPTH	HEIGHT		
RR228	24"	24"	96"	19"	200 lbs
RR328	36"			31"	210 lbs
RR428	48"			43"	228 lbs
RR238	24"	36"		19"	216 lbs
RR338	36"			31"	226 lbs
RR438	48"			43"	244 lbs
RR2210	24"	24"	120"	19"	237 lbs
RR3210	36"			31"	247 lbs
RR4210	48"			43"	265 lbs
RR2310	24"	36"		19"	253 lbs
RR3310	36"			31"	263 lbs
RR4310	48"			43"	281 lbs
RR2212	24"	24"	144"	19"	296 lbs
RR3212	36"			31"	306 lbs
RR4212	48"			43"	324 lbs
RR2312	24"	36"		19"	312 lbs
RR3312	36"			31"	322 lbs
RR4312	48"			43"	340 lbs
RR-BKT	Axle Brackets (per pair)				6 lbs

\* WIDTH FIGURE REPRESENTS THE INSIDE DIMENSION. ADD 8" TO WIDTH FIGURE FOR OVERALL WIDTH DIMENSION.

**• 2000 LB CAPACITY PER LEVEL**

ADD-ON UNITS					
MODEL NO.	DIMENSIONS*			MAX. REEL WIDTH	WEIGHT
	WIDTH	DEPTH	HEIGHT		
RR228-A	24"	24"	96"	19"	125 lbs
RR328-A	36"			31"	135 lbs
RR428-A	48"			43"	153 lbs
RR238-A	24"	36"		19"	133 lbs
RR338-A	36"			31"	143 lbs
RR438-A	48"			43"	161 lbs
RR2210-A	24"	24"	120"	19"	147 lbs
RR3210-A	36"			31"	157 lbs
RR4210-A	48"			43"	175 lbs
RR2310-A	24"	36"		19"	155 lbs
RR3310-A	36"			31"	165 lbs
RR4310-A	48"			43"	183 lbs
RR2212-A	24"	24"	144"	19"	176 lbs
RR3212-A	36"			31"	186 lbs
RR4212-A	48"			43"	204 lbs
RR2312-A	24"	36"		19"	184 lbs
RR3312-A	36"			31"	194 lbs
RR4312-A	48"			43"	212 lbs

\* WIDTH FIGURE REPRESENTS THE INSIDE DIMENSION. OVERALL WIDTH WILL INCREASE BY 4" WHEN ADDED TO A STARTER UNIT.

**SEE PAGE 45  
FOR ADDITIONAL  
REEL HANDLING EQUIPMENT**