



200PN
CONVERTIBLE
2-IN-1 TRUCK


200 SERIES CONVERTIBLE 2-IN-1 TRUCK

A 2 WHEEL HAND TRUCK OR A 4 WHEEL PLATFORM TRUCK

The **MECO OMAHA** 2-in-1 Truck converts from a 2 wheel hand truck to a 4 wheel platform truck in seconds—no tools required. As a platform truck the usable deck space is a generous 14" wide x 36" long. The 7 ga. x 8" x 14" toe plate contains the load in the horizontal or vertical position. Available with commercial duty 8" semi-pneumatic wheels or industrial duty 10" full pneumatic wheels. Orange enamel finish.

• SHIPS VIA UPS

MODEL NO.	WHEELS	CAPACITY	HANDLE HEIGHT	OVERALL WIDTH	WEIGHT
200SP	8" x 1 3/4" Semi-Pneumatic	300 lbs - 2 Whl	46" & 68"	20"	35 lbs
	3" Rubber Swivel Casters	450 lbs - 4 Whl	45" - 4 Whl		
200PN	10" x 3 1/2" Full Pneumatic	600 lbs - 2 Whl	46" & 68"	21 1/4"	41 lbs
	5" Rubber Swivel Casters	600 lbs - 4 Whl	46" - 4 Whl		

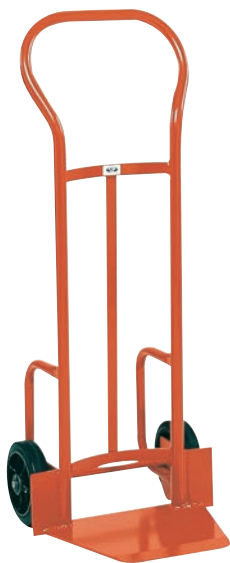

82H
HEAVYWEIGHT
SHOVEL TRUCK

HEAVYWEIGHT SHOVEL TRUCK

A REAL BRUTE • VIRTUALLY INDESTRUCTIBLE

This **MECO OMAHA** Heavyweight Shovel Truck is designed for heavy duty performance and rough use. The 1 1/4" diameter frame is all double welded. The 5/16" steel toe plate is 14" long and tapers from 17" at the rear to 11" at the front—beveled and rounded for easy loading. Equipped with 1 1/16" diameter stairglides behind wheels for ease in maneuvering over curbs and up stairs. Heavy fenders keep wide loads from rubbing wheels. The Heavyweight is equipped with 8" x 2" mold-on rubber or steel wheels with roller bearings and grease fittings; 3/4" cold drawn steel axle. Also available with plain bore polyolefin wheels. A truly heavy duty truck!

• 17" X 14" TOE PLATE

MODEL NO.	WHEELS	HEIGHT	WIDTH	CAPACITY	WEIGHT
82H	8" x 2" Mold-On Rubber	50"	19 3/4"	1000 lbs	59 lbs
92H	8" x 2" Steel			1500 lbs	70 lbs
82P	8" x 2" Polyolefin			1500 lbs	52 lbs

6 YEAR GUARANTEE AGAINST FRAME BREAKAGE



54VR
FOUR WHEEL
WAREHOUSE TRUCK

FOUR WHEEL WAREHOUSE TRUCK

IDEAL FOR PALLET LOADING AND UNLOADING

MECO OMAHA's heavy duty Warehouse Truck is perfectly balanced for easy breaking back over rear wheels. The heavy duty 1 1/4" diameter frame is double welded to ensure long life. The 1/4" steel toe plate is 14" long and tapers from 18" at the rear to 11 1/2" at the front—beveled and rounded for easy loading. Available with 10" x 2 1/2" steel or mold-on rubber wheels with roller bearings and grease fittings; polyolefin wheels have a plain bore.

• 1000 LB CAPACITY

MODEL NO.	WHEELS	HEIGHT	WIDTH	WEIGHT
54VR	2 - 10" x 2 1/2" Mold-On Rubber 2 - 6" x 2" Mold-On Rubber	62"	24 1/2"	93 lbs
54SS	2 - 10" x 2 1/2" Steel 2 - 6" x 2" Steel			96 lbs
54P	2 - 10" x 2 1/4" Polyolefin 2 - 6" x 2" Polyolefin			67 lbs

6 YEAR GUARANTEE AGAINST FRAME BREAKAGE