



ADJUSTABLE PALLET STAND

HELPS ELIMINATE BACK STRAIN AND FATIGUE

The **MECO OMAHA** Adjustable Pallet Stand has three comfortable working heights and access from all sides. By grasping the safety handle the Adjustable Pallet Stand can be set up easily by just one person. A lock prevents the stand from folding while in use.


Made of sturdy structural channel, this all welded unit is designed for use in areas requiring high capacity support tables such as shipping rooms, machine shops and maintenance departments. Folds down to 8³/₄".

Choose model APS2C with two swivel/two rigid 5" x 2" phenolic casters for easy movement within the plant or shop.

Gray enamel finish.

• 4000 LB CAPACITY

MODEL NO.	TOP SIZE	ADJUSTING HEIGHTS	WEIGHT
APS2	40" x 40"	24" - 30 ¹ / ₂ " - 34"	199 lbs
APS2C		30 ¹ / ₂ " - 37" - 40 ¹ / ₂ "	224 lbs

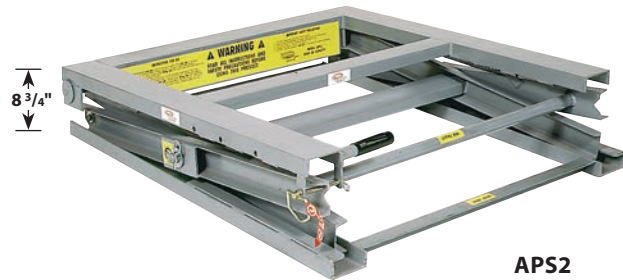

APS2
In Folded Position

**SEE PAGE 31
FOR REEL RACKS**

REEL WINDERS

HANDLE MATERIAL ON REELS QUICKLY AND EFFICIENTLY

Ideal for unreeling wire rope, cable and chain or almost anything that is stored on a reel. The structural channel frame has six roller positions to allow adjustment for virtually any reel diameter and is punched for floor mounting. The 2¹/₂" diameter rollers spin freely on ball bearing surfaces; side rollers ensure smooth pay off. A 10 ga. steel ramp permits safe on and off loading. The RW1 and RW2 are one piece units, the RW3 consists of two separate pieces. Orange enamel finish; ships via UPS.

• 4" HIGH X 28" LONG


MODEL NO.	NUMBER OF REELS	MAXIMUM REEL WIDTH	WIDTH	CAPACITY	WEIGHT
RW1	1	28"	31 ¹ / ₂ "	3000 lbs	73 lbs
RW2	1 or 2	48" or 24"	52"		114 lbs
RW3	1	Unlimited	9 ¹ / ₄ "		79 lbs



RW1



RW3

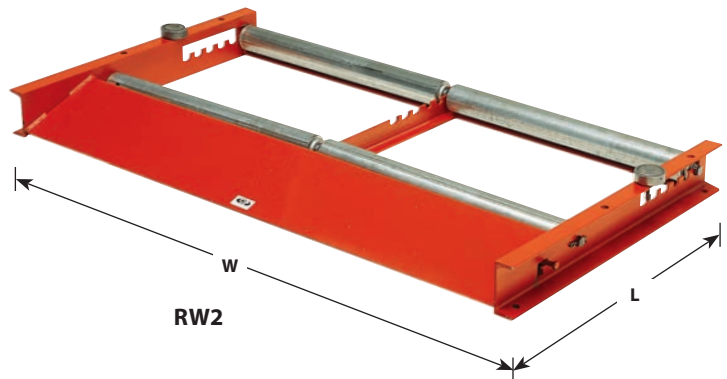

RW2



FORKLIFT PLATFORMS

USED WITH A FORKLIFT TO REACH HIGH PLACES SAFELY

Perform maintenance projects and order picking safely with a **MECO OMAHA** Forklift Platform. The non-slip floor plate deck is surrounded by a 4" toe plate to contain loose objects. Units are held securely to lift truck by a safety chain; 42" high side rails and positive locking gate keep worker safe. Worker is separated from vehicle by expanded metal screen. Full length 2 3/4" x 8" fork pockets ensure easy fork entry and exit.

Platforms can be customized with optional 3" casters for mobility, tool trays to keep parts and tools at worker's fingertips, 24" and 84" high bolt-on riser screens and a tube and bulb caddy to contain long parts requiring on-end storage. Casters provide 1000 lb. capacity and increase overall height of unit by 4 1/2".

• YELLOW ENAMEL FINISH • SHIPS KNOCKED DOWN

MODEL NO.	PLATFORM (W x D)	HEIGHT	FORK POCKET SPACING	WEIGHT
MPL1	36" x 32"	45"	16 1/4" Centers 8" Apart	152 lbs
MPL2	36" x 36"			163 lbs
MPL3	36" x 48"			198 lbs
MPL4	48" x 40"		28 1/4" Centers 20" Apart	207 lbs
MPL5	48" x 48"			230 lbs

• FORKLIFT PLATFORM ACCESSORIES

MODEL NO.	DESCRIPTION	WEIGHT
CK3P	Four 3" Polyolefin Swivel Casters	8 lbs
TT36	Tool Tray - 36" wide	7 lbs
TT48	Tool Tray - 48" wide	9 lbs
BCR36	24" Riser Screen - 36" wide	16 lbs
BCR48	24" Riser Screen - 48" wide	22 lbs
BCR36-84	84" Riser Screen - 36" wide	29 lbs
BCR48-84	84" Riser Screen - 48" wide	36 lbs
FBC	Tube and Bulb Caddy	19 lbs

MECO OMAHA FORKLIFT PLATFORMS CONFORM TO ANSI/ITSDF STANDARD B56.1-2012.



MPL3
With Optional
CK3P Caster Kit

MPL3
With Optional
Riser Screen (BCR36),
Tube Caddy (FBC),
Tool Tray (TT36)
and Casters (CK3P)



FORKLIFT STOCK PICKER

ACCOMMODATES PALLETS TO 42" DEEP

This narrow-aisle work platform excels as an aerial stock picker. The expanded metal screen extends 84" above the deck shielding the worker from the forklift mechanism. A mast chain secures the stock picker to the forklift. Man-on-board is restrained by a double safety chain and 42" high guard rails.

A 4" toe plate surrounds the non-slip floor plate deck. Forklift entry is easy with the exclusive **MECO OMAHA** tapered fork pocket design. 3" x 5 1/2" fork pockets taper to 2" x 3 1/2" and are mounted on 23" centers; 17" between pockets.

• YELLOW ENAMEL FINISH • SHIPS KNOCKED DOWN

MODEL NO.	PLATFORM (W x D)	OVERALL DEPTH	OVERALL HEIGHT	WEIGHT
FSP1	29" x 20"	60"	87"	256 lbs

TOTAL WEIGHT OF WORKER AND LOAD NOT TO EXCEED 1000 LBS.



FSP1




BAR CRADLE TRUCKS

FOR EASY HANDLING OF BAR STOCK, PIPE AND TUBING

Framed with structural channel, this truck is as rock solid as it looks. The 3" wide cradles are supported by structural channel on the bottom and both sides. Cradles are 24" across and 13" deep to accept large bundles of stock.

The 12" phenolic load wheels are known for exceptional strength and resistance to oil, gasoline and most commonly used solvents and chemicals. Eight inch swivel caster at each end and a tilt pattern permit the truck to turn in its own radius. All wheels have roller bearings.

Capacities based on evenly distributed loads. Gray enamel finish.

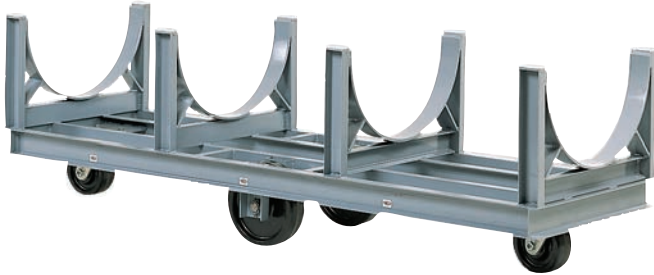

BCT96-10

• ALL TRUCKS ARE 28" WIDE x 29" HIGH

MODEL NO.	CAPACITY	LENGTH	RUNNING GEAR	NO. OF CRADLES	WEIGHT
BCT60-4	4,000 lbs	60"	2 - 12" x 2 1/2" Phenolic Load Wheels 2 - 8" x 2" Polyolefin Swivel Casters	3	194 lbs
BCT96-4		96"			229 lbs
BCT60-10	10,000 lbs	60"	2 - 12" x 3" Phenolic Load Wheels 2 - 8" x 2" Phenolic Swivel Casters		248 lbs
BCT72-10		72"			262 lbs
BCT96-10		96"		316 lbs	
BCT120-10		120"		423 lbs	
BCT144-10		144"		483 lbs	

NOT TO BE USED ON RAMPS, SLOPES OR INCLINED SURFACES.

BAR STORAGE TRUCKS

ALL-SWIVEL CASTERS PROVIDE MAXIMUM MANEUVERABILITY IN TIGHT QUARTERS

Transport bundles of steel, pipe, tube, lumber or any other long, heavy material with the **MECO OMAHA** Bar Storage Truck. Loads are safely contained by six structural channel posts. The 4" structural channel frame handles loads to 5600 lbs. Deck height is a convenient 16"; all wheels have roller bearings. Gray enamel finish.




BST-SS

• 5600 LB CAPACITY

MODEL NO.	WIDTH	LENGTH	SWIVEL CASTERS	WEIGHT
BST-PH	24"	84"	8" x 2" Phenolic	242 lbs
BST-SS			8" x 2" Steel	240 lbs

PANEL MOVERS FOR NO-HASSLE TRANSPORT OF PANELS, SHEETS AND BUILDING MATERIALS

A hefty 12 ga. steel frame supports long, bulky items that must be moved on edge. The PM1 consists of an all-steel frame; the PM2 has two non-slip carpeted cross battens to protect fragile items. Three removable U-rails provide two 11 1/2" wide load bays, rails extend 27 1/2" above the PM1 frame and 26" above the PM2 frame. Both units ship knocked down in a carton via UPS. Gray enamel finish with galvanized steel U-rails. All-swivel casters are bolted to the frame for easy replacement.

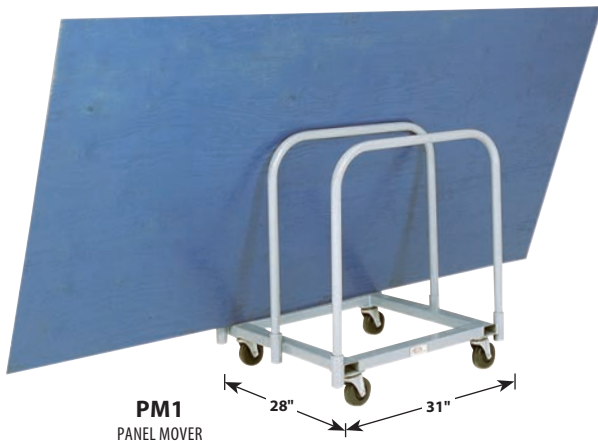

PM1
PANEL MOVER

• 900 LB CAPACITY

MODEL NO.	FRAME	LENGTH	WIDTH	HEIGHT	SWIVEL CASTERS	WEIGHT
PM1	Steel	31"	28"	34"	4" Hard Rubber	61 lbs
PM2	Carpeted					65 lbs